

# LC185-24M

## High-efficiency PV Module

### Features

- high energy yields ensured by high conversion efficiency
- sturdy, clear-anodized aluminum frame with pre-drilled holes for quick installation
- advanced EVA encapsulation with triple-layer backsheet, meets the most stringent safety requirements for high-voltage operation
- pre-wired junction box equipped with connectors "plug'n'play"
- reliable bypass diodes to prevent overheating (hot spot effect) and to minimise power loss by shading
- manufactured in ISO 9001:2000-certified factory

### Applications

- water pumping
- water purification systems
- remote village lighting
- solar home systems
- street and camp lights
- traffic signals
- medical facilities in remote areas
- microwave/radio repeater stations
- battery charging
- etc.



photo may differ from actual product

### Warranty

- Warranty: 2 years
- Performance guarantee:  
up to 10 years (90% power output)  
up to 20 years (80% power output)

Details according to warranty issued by LORENTZ

### Standards

LC185-24M is certified according to IEC 61215 and 61730 by TÜV Rheinland and meets the requirements for CE.



- Qualified, IEC 61215
- Safety tested, IEC 61730
- Periodic Inspection



### Specifications

#### Electrical Data

Peak power	P <sub>max</sub>	[Wp]	185
Tolerance		[%]	+3/-3
Max. power current	I <sub>mp</sub>	[A]	5.1
Max. power voltage	V <sub>mp</sub>	[V]	36.4
Short circuit current	I <sub>sc</sub>	[A]	5.5
Open circuit voltage	V <sub>oc</sub>	[V]	44.8
Temperature co-efficient for P <sub>max</sub>		[%/°C]	-0.50
Temperature co-efficient for V <sub>oc</sub>		[%/°C]	-0.35
Temperature co-efficient for I <sub>sc</sub>		[%/°C]	0.09
Max. system voltage		[V]	1,000

All technical data at standard test condition:

AM = 1.5, E = 1,000W/m<sup>2</sup>, cell temperature: 25 °C

#### Cells

Number of cells in series	72
Number of cells in parallel	1
Cell technology	monocrystalline
Cell shape	rectangular

To find out more visit [www.lorentz.de](http://www.lorentz.de)

BERNT LORENTZ GmbH & Co. KG

Kroegerskoppel 7, 24558 Henstedt-Ulzburg, Germany

Tel. +49 (0) 4193 7548 -0, Fax - 29, [www.lorentz.de](http://www.lorentz.de)


Errors excepted and possible alterations without prior notice.

**Sun. Water. Life.**

## Electrical Performance


### Electrical Performance

for different temperatures, at AM=1.5, E=1,000W/m<sup>2</sup>




### Electrical Performance

for different irradiation, at 25 °C




### Temperature Dependence

of I<sub>sc</sub>, V<sub>oc</sub> and P<sub>max</sub>




### Irradiation Dependence

of I<sub>sc</sub>, V<sub>oc</sub> and P<sub>max</sub> at 25 °C



## Physical Specifications mm [in]

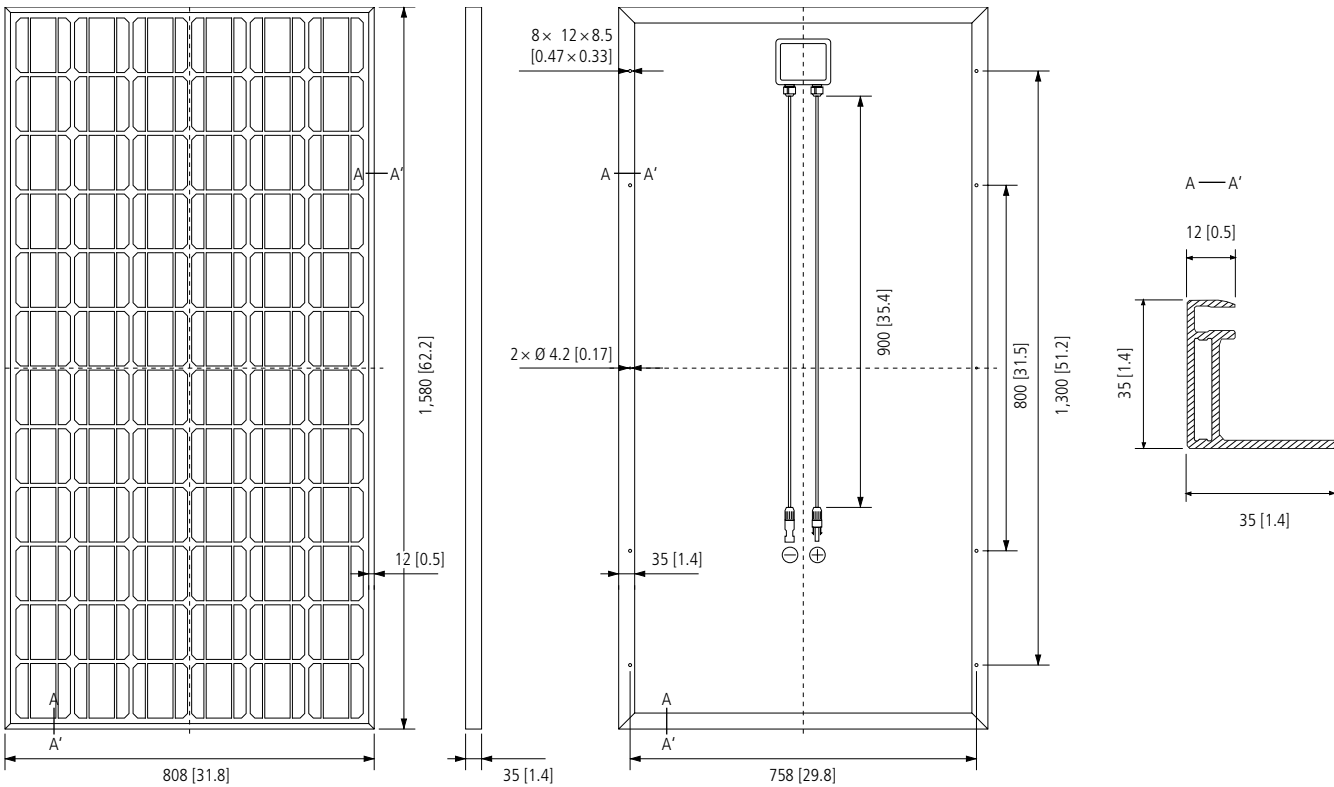

Weight	[kg]	15.4
Dimension	[mm]	808 × 1,580 × 35
Strength	[N/m <sup>2</sup> ]	2,400
Cable		approx. 900 mm / 35 in, 4 mm <sup>2</sup> / AWG 12
Connectors		NBZH PV-ZH202 or compatible

To find out more visit [www.lorentz.de](http://www.lorentz.de)

BERNT LORENTZ GmbH & Co. KG  
 Kroegerskoppel 7, 24558 Henstedt-Ulzburg, Germany  
 Tel. +49 (0) 4193 7548 - 0, Fax - 29, [www.lorentz.de](http://www.lorentz.de)  
 Errors excepted and possible alterations without prior notice.

Sun. Water. Life.